


Press middle front radiator grille (1) upwards and pull towards front.

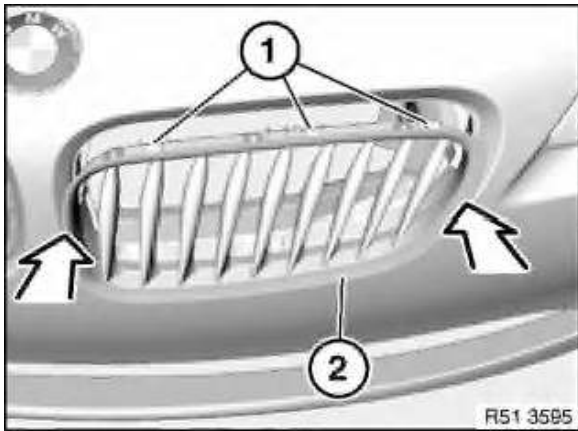


Installation:

All catches and guides on middle front grille must not be damaged.

Press on chrome ring to push front radiator grille (2) into bumper trim.

Fixtures (1) must engage correctly.




Replacement:

Replace front radiator grille, middle left or right .

*Necessary preliminary tasks:*

- Remove front radiator grille, middle left or right

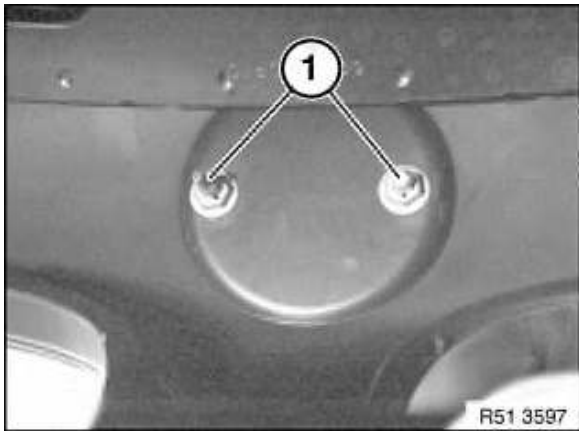

Release plastic nuts (1).

Remove badge towards front.

Installation:

Carefully tighten plastic nuts (1).