



BAVARIAN AUTOSPORT

Angel Eye Headlight Wiring Instructions

NOTE: This installation sheet covers the Angel Eye wiring harness only. Overall installation of the headlight assemblies is a direct replacement for the original headlights. The applicable Bentley Repair Manual will cover headlight removal and replacement.

5 Series

97 thru 03


KIT NUMBERS:

E39LHL-BXXXXXX

Angel Eye Headlight Kits

PROCEDURE:

1. Connect the positive lead to a constant 12-volt source, such as the positive terminal junction block (jumper cable terminal) in the engine compartment.
2. Connect the negative lead to a ground source, such as the grounding terminal near the positive block, a grounding stud on the engine or a strut tower stud/nut.
3. Connect the left and right parking light spades to the positive wires of the left and right parking lights using the supplied crimp-on female "T-tap" terminals. The positive wires will be colored and the ground wires will be brown (different models will use different colored positive wires, but the ground will always be brown). Fold the red "T-tap" terminal over the parking light positive wire and pinch the terminal closed with a pair of pliers (do this for each side, left and right). The terminals are now ready for insertion of the male spade terminals from the Angel Eye wiring harness.

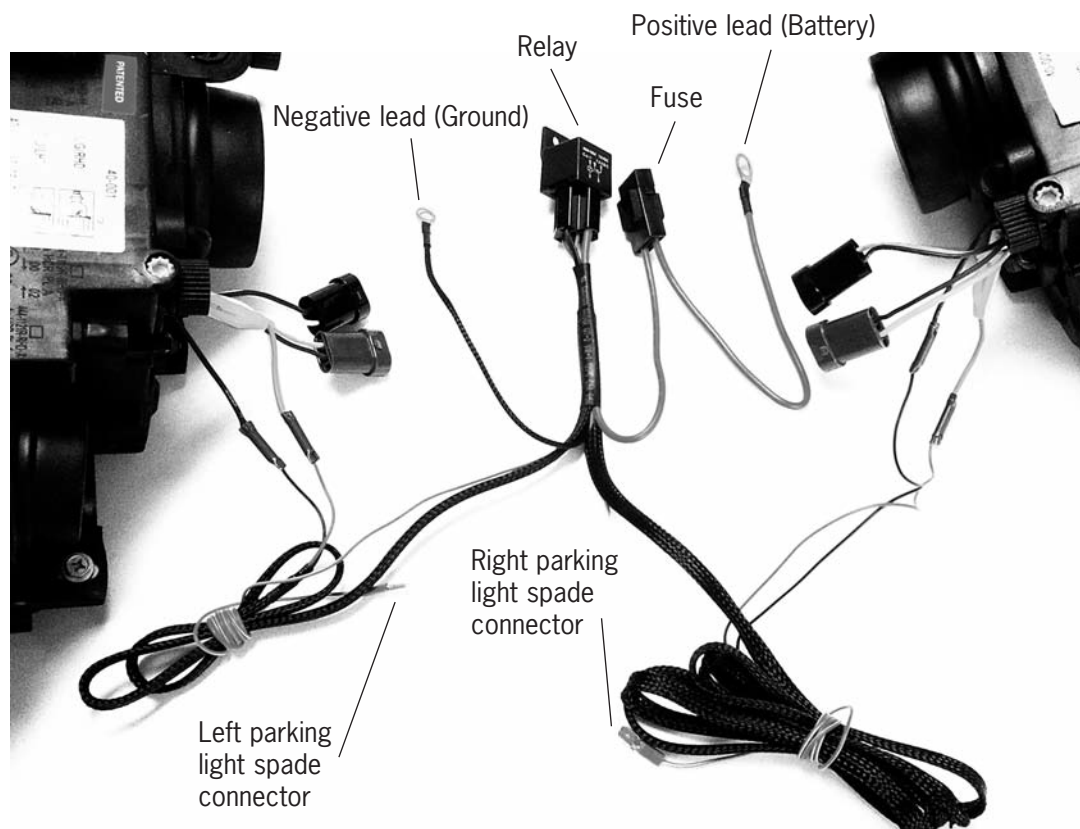

BAVARIAN[®]
autosport

Call Toll Free: **1.800.535.2002**

275 Constitution Avenue, Portsmouth, NH 03801

• 603.427.2002

• Fax 800.507.2002

• www.BavAuto.com